




Enecsys Micro Inverters

SMI-S240W-60

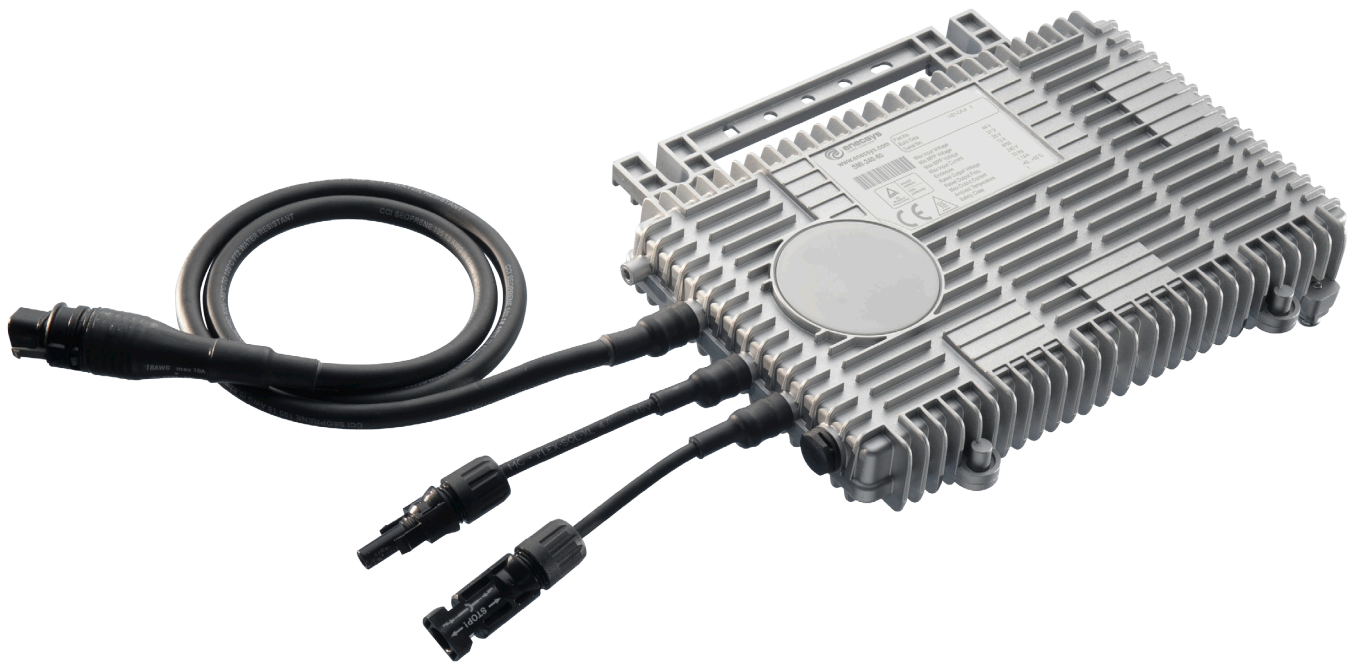

Maximized Energy Harvest

Improved Safety

Increased Lifetime & Reliability

Enhanced Monitoring Capability

Simplified PV Array Design & Installation

Enecsys develops, manufactures and markets world leading, highly reliable grid-connected solar micro inverters and monitoring systems that offer an outstanding value proposition for solar PV systems.

Enecsys Ltd
Harston Mill, Royston Rd
Cambridge, CB22 7GG, UK
Tel. +44 1223 792101
Fax. +44 1223 792103
uk-sales@enecsys.com

Enecsys Europe GmbH
Louisenstraße 65
61348 Bad Homburg, Deutschland
Tel. +49 6172 8552430
Fax. +49 6172 8552440
europe-sales@enecsys.com

Enecsys LLC
275 Shoreline Drive, Suite 200
Redwood Shores, CA 94065, USA
Tel. +1 855-ENECSYS (Toll Free)
Tel. +1 650-730-5700
northamerica-sales@enecsys.com

Enecsys Taiwan
9F, No.8, Ln. 321, Yangguang St
Neihu District, Taipei City 114
Taiwan (R.O.C.)
Tel. +886-2-2627-6118
taiwan-sales@enecsys.com

info@enecsys.com | www.enecsys.com

Technical Specification

SMI-S240W-60-(see "ordering information" for region code)

Input Data (DC)

Nominal Input Power	240W
Recommended Input Power (STC)	260W
Maximum DC Voltage	44V
Minimum DC Voltage	20V
MPPT Voltage Range	23V - 35V
Min/Max Start-up Voltage	22V / 42.5V
Maximum Input Current	12A
Maximum Input Short-circuit Current	16A

Output Data (AC)

Maximum AC Output Power	225W
Nominal AC Output Current	0.98A
Nominal Output Voltage	230V
Nominal Frequency	50Hz
Power Factor	> 0.95
Total Harmonic Distortion	< 5%
Maximum Fault Current	8.5A AC 3ms

Efficiency

Euro Efficiency	91.5%*1
Peak Efficiency	94.8%
Maximum Night Power Consumption	< 30mW

Mechanical Data

Operating Temperature Range	-40°C to +85°C
Enclosure Rating	IP66
Dimensions (LxHxW)	262mm x 160mm x 35mm*2
Weight	1.8kg
Cooling	Natural Convection

Features & Compliance

Safety Class Compliance	CE, pr EN 62109-1
EMC (Emission & Immunity) Compliance	EN61000-6-3, EN61000-6-1
Grid Connection Compliance	G83/ 1-1*3, VDE 01 26-1, IEC 61727, IEC 62116
Communication	Zigbee IEEE 802.15.4
Connector	MC4
PV Compatibility	Compatible with most 60 cell modules
Warranty	20 Years (at full ambient temperature range)
Technology	Thin film capacitors
Isolation	Galvanic

Ordering Information

Region code	Region
-DE	Germany
-FR	France
-IT	Italy
-UK	United Kingdom

*1 - Efficiency maintained over full ambient temperature range from -40°C to +85°C and at nominal output power

*2 - Without the mounting bracket

*3 - In accordance with the Enecsys installation guidelines (please refer to the Enecsys Installation Manual)

All technical specifications contained within this document are subject to change without prior notice